



Consumer unit L · PV · flush-mounted · door: oak

Large house of 150–250 m², usually two-storey — separate circuits for each floor, the garage and the garden, with solar PV: inverter section, a box on the panel side and space for a home battery.

PLN 8,019.60

incl. 23% VAT · PLN 6,520.00 excl. VAT · excluding delivery

Size **Size L — large house of 150–250 m², about 22 circuits**
Enclosure **72-module enclosure — room for the inverter and home battery**

Some items have a preliminary price (new in our range) — we will confirm it when we check your order.

22 circuits in 4 groups of 4-pole Type A RCDs (30 mA), induction hob on a 3-phase circuit, T1+T2 surge protection. Solar PV: inverter section (AC side), a DC combiner box on the panel side and a battery section — ready for a battery. 72-module enclosure (4 rows × 18) — room for the inverter and home battery. Devices take 54 — 25% spare.

MOUNTING AND DIMENSIONS

Mounting	flush-mounted — back box built into the wall, frame with door
Wall opening	560 × 780 mm, depth 127 mm
Minimum wall thickness	150 mm
Frame with door (visible)	620 × 810 mm

Approximate dimensions — we confirm them against the data sheet of the selected enclosure in the order confirmation (before you cut the recess).



CONTENTS

72-module enclosure · 4 rows · devices take 54

Main switch, surge protection device, phase indicators, N/PE terminal bars	8 mod.
4-pole Type A residual current devices (RCDs) × 4 (circuit groups)	16 mod.
Circuit breakers (MCBs) × 22 (sockets, lighting, appliances; induction hob — 3-phase)	24 mod.
Flush-mounted enclosure (back box for building into the wall, frame with door)	—
Door: oak	—
Solar PV — inverter AC section	3 mod.
Solar PV — DC combiner box, 2 MPPT — separate enclosure: Solar PV — DC combiner box, 2 MPPT — IP65	—
Home battery — battery / hybrid inverter section	3 mod.

SPECIFICATIONS

Door: **Oak — Wood-effect veneer in natural oak.**

DIN modules: **54 used of 72 (spare 18)**

Circuits: **22 (max. 30 in this enclosure)**

Residual current devices (RCDs): **4 × 4-pole 40 A, 30 mA, Type A — circuits split into groups**

Surge protection device (SPD): **T1+T2**

Lead time: 5–10 working days from receipt of the deposit.

Included: wiring diagram, circuit chart, test report, EU declaration of conformity, 24-month warranty. Built to EN 61439-3 (PN-EN 61439-3). Technical documents are issued in Polish.

<https://svalcon.co.uk/products/l-pv?mounting=flush>

Consumer unit L · PV · flush-mounted · door: oak

CIRCUITS AND RCD GROUPS

Typical set of circuits for this size (board model shared by the shop and the workshop). Cable sizes are indicative — selected by length and installation method.

Circuit names and the diagram are in Polish.


Ref.	Circuit / load	Protection	Poles	Phase	Cable	RCD
F1	Gniazda — kuchnia (blat)	B16	1P	L3	3×2,5	Q1
F2	Łazienka — gniazda	B16	1P	L1	3×2,5	Q1
F3	Pralka	B16	1P	L3	3×2,5	Q1
F4	Gniazda — sypialnie	B16	1P	L2	3×2,5	Q1
F5	Oświetlenie zewnętrzne	B10	1P	L3	3×1,5	Q1
F6	Gniazda — sypialnia główna	B16	1P	L3	3×2,5	Q1
F7	Oświetlenie — strefa dzienna	B10	1P	L1	3×1,5	Q2
F8	Zmywarka	B16	1P	L2	3×2,5	Q2
F9	Oświetlenie — pomieszczenia gospodarcze	B10	1P	L1	3×1,5	Q2
F10	Łazienka 2 — gniazda	B16	1P	L3	3×2,5	Q2
F11	Gniazda — piętro (pokoje)	B16	1P	L2	3×2,5	Q2
F12	Rezerwa 2	B16	1P	L2	3×2,5	Q2
F13	Gniazda — salon	B16	1P	L2	3×2,5	Q3
F14	Piekarnik	B16	1P	L1	3×2,5	Q3
F15	Gniazda zewnętrzne / ogród (IP44)	B16	1P	L3	3×2,5	Q3
F16	Oświetlenie — piętro	B10	1P	L1	3×1,5	Q3
F17	Garaż / kotłownia	B16	1P	L1	3×2,5	Q3
F18	Płyta indukcyjna (3-fazowa)	B16	3P	L1–L3	5×2,5	Q4
F19	Oświetlenie — sypialnie i korytarz	B10	1P	L2	3×1,5	Q4
F20	Suszarka	B16	1P	L2	3×2,5	Q4
F21	Gniazda — pokój / biuro	B16	1P	L1	3×2,5	Q4
F22	Rezerwa	B16	1P	L1	3×2,5	Q4
F23	Falownik PV — strona AC — Ochrona różnicowoprądowa w...	C20	3P	L1–L3	5×4	—
F24	Magazyn energii / falownik hybrydowy (przygotowanie) — ...	C20	3P	L1–L3	5×4	—

RCD GROUPS

Q1	RCD 4P 40 A 30 mA typ A: F1, F2, F3, F4, F5, F6
Q2	RCD 4P 40 A 30 mA typ A: F7, F8, F9, F10, F11, F12
Q3	RCD 4P 40 A 30 mA typ A: F13, F14, F15, F16, F17
Q4	RCD 4P 40 A 30 mA typ A: F18, F19, F20, F21, F22

marka wg dostępności · podtynkowa · nr wzór

Zasilanie z licznika: 3/N/PE ~ 400/230 V 50 Hz · sieć TN-C-S · zabezpieczenie przedlicznikowe gG / B ≤ 32 A (typowo 25–32 A, wg warunków przyłączenia)

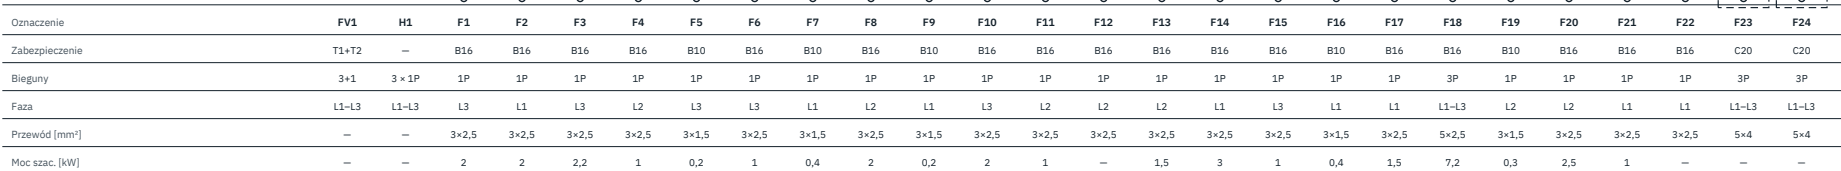

Odbiornik



I Skrzynka DC fotowoltaiki – osobna obudowa IP65



Svalcon · Consumer unit L · PV · flush-mounted · door: oak

Nr wzór · marka wg dostępności · obudowa — (6 × 12 mod.)

Wersja karta 2026-10-14 · 2026-10-25 · arkusz 1/1

SZKIC – do weryfikacji przez elektryka uprawnionego