



# Consumer unit M · PV · flush-mounted

Single-family house up to about 150 m<sup>2</sup> (usually single-storey), with solar PV: inverter section, a box on the panel side and space for a home battery.

## PLN 7,355.40

incl. 23% VAT · PLN 5,980.00 excl. VAT · excluding delivery

|           |                                                                                                                                                  |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Size      | <b>Size M — single-family house up to approx. 150 m<sup>2</sup>, about 16 circuits</b>                                                           |
| Enclosure | <b>72-module enclosure — room for the inverter and home battery; one size up from the Standard version (48 modules), same number of circuits</b> |

Some items have a preliminary price (new in our range) — we will confirm it when we check your order.

16 circuits in 3 groups of 4-pole Type A RCDs (30 mA), induction hob on a 3-phase circuit, T1+T2 surge protection. Solar PV: inverter section (AC side), a DC combiner box on the panel side and a battery section — ready for a battery. 72-module enclosure (4 rows × 18) — room for the inverter and home battery; one size up from the Standard version (48 modules), same number of circuits. Devices take 44 — 38% spare.

### MOUNTING AND DIMENSIONS

|                           |                                                                      |
|---------------------------|----------------------------------------------------------------------|
| Mounting                  | <b>flush-mounted — back box built into the wall, frame with door</b> |
| Wall opening              | <b>560 × 780 mm, depth 127 mm</b>                                    |
| Minimum wall thickness    | <b>150 mm</b>                                                        |
| Frame with door (visible) | <b>620 × 810 mm</b>                                                  |

Approximate dimensions — we confirm them against the data sheet of the selected enclosure in the order confirmation (before you cut the recess).

### CONTENTS

72-module enclosure · 4 rows · devices take 44

|                                                                                                    |         |
|----------------------------------------------------------------------------------------------------|---------|
| Main switch, surge protection device, phase indicators, N/PE terminal bars                         | 8 mod.  |
| 4-pole Type A residual current devices (RCDs) × 3 (circuit groups)                                 | 12 mod. |
| Circuit breakers (MCBs) × 16 (sockets, lighting, appliances; induction hob — 3-phase)              | 18 mod. |
| Flush-mounted enclosure (back box for building into the wall, frame with door)                     | —       |
| Solar PV — inverter AC section                                                                     | 3 mod.  |
| Solar PV — DC combiner box, 2 MPPT — separate enclosure: Solar PV — DC combiner box, 2 MPPT — IP65 | —       |
| Home battery — battery / hybrid inverter section                                                   | 3 mod.  |

### SPECIFICATIONS

|                                                                                                     |                                                 |
|-----------------------------------------------------------------------------------------------------|-------------------------------------------------|
| DIN modules: <b>44 used of 72 (spare 28)</b>                                                        | Circuits: <b>16 (max. 30 in this enclosure)</b> |
| Residual current devices (RCDs): <b>3 × 4-pole 40 A, 30 mA, Type A — circuits split into groups</b> |                                                 |
| Surge protection device (SPD): <b>T1+T2</b>                                                         |                                                 |

Lead time: 5–10 working days from receipt of the deposit.

Included: wiring diagram, circuit chart, test report, EU declaration of conformity, 24-month warranty. Built to EN 61439-3 (PN-EN 61439-3). Technical documents are issued in Polish.

<https://svalcon.co.uk/products/m-pv?mounting=flush>



# Consumer unit M • PV • flush-mounted

## CIRCUITS AND RCD GROUPS

Typical set of circuits for this size (board model shared by the shop and the workshop). Cable sizes are indicative — selected by length and installation method.

Circuit names and the diagram are in Polish.

| Ref. | Circuit / load                                             | Protection | Poles | Phase | Cable | RCD |
|------|------------------------------------------------------------|------------|-------|-------|-------|-----|
| F1   | Gniazda — salon                                            | B16        | 1P    | L3    | 3×2,5 | Q1  |
| F2   | Gniazda — kuchnia (blat)                                   | B16        | 1P    | L3    | 3×2,5 | Q1  |
| F3   | Łazienka — gniazda                                         | B16        | 1P    | L1    | 3×2,5 | Q1  |
| F4   | Pralka                                                     | B16        | 1P    | L3    | 3×2,5 | Q1  |
| F5   | Oświetlenie zewnętrzne                                     | B10        | 1P    | L3    | 3×1,5 | Q1  |
| F6   | Płyta indukcyjna (3-fazowa)                                | B16        | 3P    | L1–L3 | 5×2,5 | Q2  |
| F7   | Oświetlenie — sypialnie i korytarz                         | B10        | 1P    | L1    | 3×1,5 | Q2  |
| F8   | Gniazda — sypialnie                                        | B16        | 1P    | L2    | 3×2,5 | Q2  |
| F9   | Suszarka                                                   | B16        | 1P    | L2    | 3×2,5 | Q2  |
| F10  | Gniazda zewnętrzne / ogród (IP44)                          | B16        | 1P    | L1    | 3×2,5 | Q2  |
| F11  | Oświetlenie — strefa dzienna                               | B10        | 1P    | L3    | 3×1,5 | Q3  |
| F12  | Piekarnik                                                  | B16        | 1P    | L1    | 3×2,5 | Q3  |
| F13  | Zmywarka                                                   | B16        | 1P    | L2    | 3×2,5 | Q3  |
| F14  | Gniazda — pokój / biuro                                    | B16        | 1P    | L2    | 3×2,5 | Q3  |
| F15  | Oświetlenie — pomieszczenia gospodarcze                    | B10        | 1P    | L3    | 3×1,5 | Q3  |
| F16  | Rezerwa                                                    | B16        | 1P    | L1    | 3×2,5 | Q3  |
| F17  | Falownik PV — strona AC — Ochrona różnicowoprądowa w...    | C20        | 3P    | L1–L3 | 5×4   | —   |
| F18  | Magazyn energii / falownik hybrydowy (przygotowanie) — ... | C20        | 3P    | L1–L3 | 5×4   | —   |


## RCD GROUPS

- Q1 RCD 4P 40 A 30 mA typ A: F1, F2, F3, F4, F5
- Q2 RCD 4P 40 A 30 mA typ A: F6, F7, F8, F9, F10
- Q3 RCD 4P 40 A 30 mA typ A: F11, F12, F13, F14, F15, F16

Schemat jednokreskowy – Consumer unit M · PV · flush-mounted

marka wg dostępności · podtynkowa · nr wzór

Zasilanie z licznika: 3/N/PE – 400/230 V 50 Hz · sieć TN-C-S · zabezpieczenie przedlicznikowe gG / B ≤ 32 A (typowo 25–32 A, wg warunków przyłączenia)

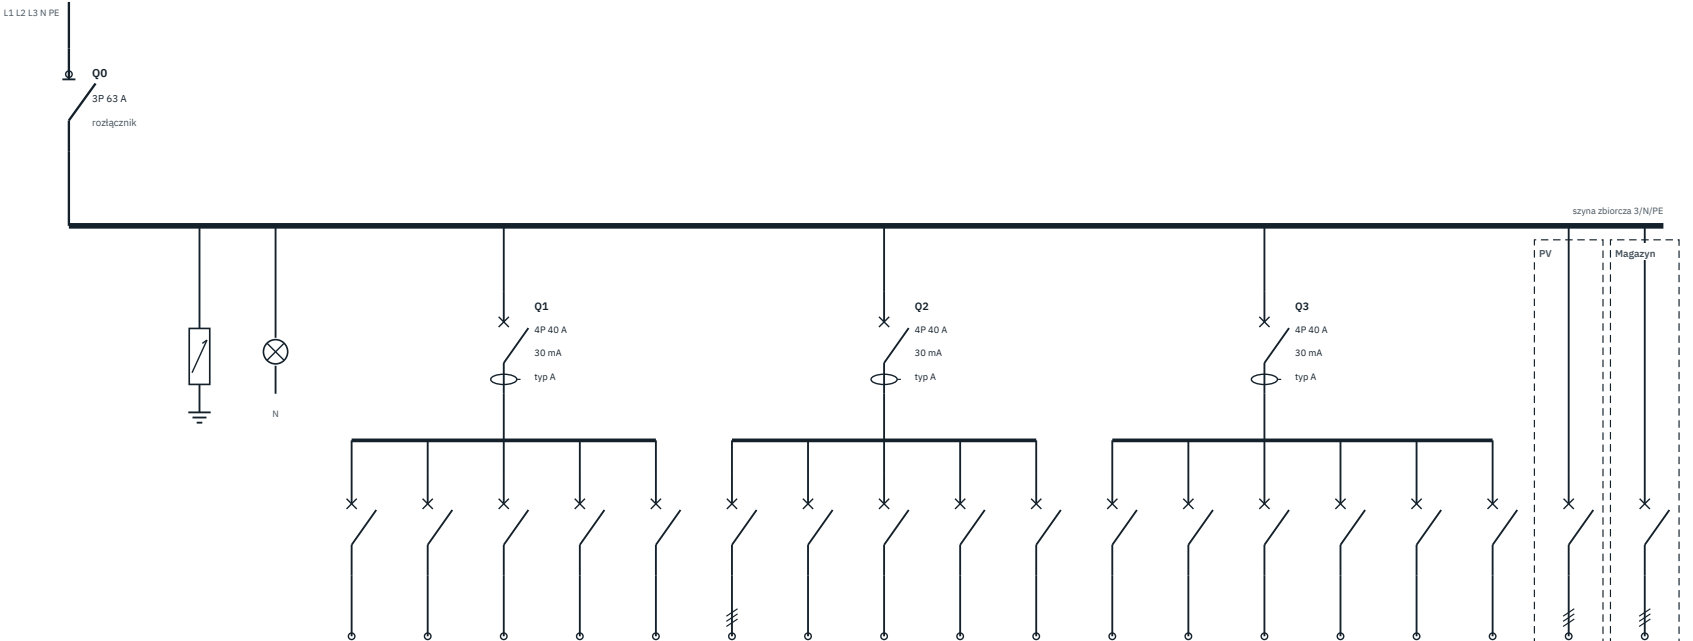

| Oznaczenie     | FV1   | H1     | F1    | F2    | F3    | F4    | F5    | F6    | F7    | F8    | F9    | F10   | F11   | F12   | F13   | F14   | F15   | F16   | F17   | F18   |
|----------------|-------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Zabezpieczenie | T1+T2 | –      | B16   | B16   | B16   | B16   | B10   | B16   | B10   | B16   | B16   | B16   | B10   | B16   | B16   | B16   | B10   | B16   | C20   | C20   |
| Bieguny        | 3+1   | 3 × 1P | 1P    | 1P    | 1P    | 1P    | 1P    | 3P    | 1P    | 1P    | 1P    | 1P    | 1P    | 1P    | 1P    | 1P    | 1P    | 1P    | 3P    | 3P    |
| Faza           | L1–L3 | L1–L3  | L3    | L3    | L1    | L3    | L3    | L1–L3 | L1    | L2    | L2    | L1    | L3    | L1    | L2    | L2    | L3    | L1    | L1–L3 | L1–L3 |
| Przewód [mm²]  | –     | –      | 3×2,5 | 3×2,5 | 3×2,5 | 3×2,5 | 3×1,5 | 5×2,5 | 3×1,5 | 3×2,5 | 3×2,5 | 3×2,5 | 3×1,5 | 3×2,5 | 3×2,5 | 3×2,5 | 3×1,5 | 3×2,5 | 5×4   | 5×4   |
| Moc szac. [kW] | –     | –      | 1,5   | 2     | 2     | 2,2   | 0,2   | 7,2   | 0,3   | 1     | 2,5   | 1     | 0,4   | 3     | 2     | 1     | 0,2   | –     | –     | –     |

Odbiornik

Ogranicznik przepięć – PE

Lampki obecności faz

Gniazda – salon

Gniazda – kuchnia (blat)

Lazienka – gniazda

Pralka

Oświetlenie zewnętrzne

Płyta indukcyjna (3-fazowa)

Oświetlenie – sypialnie i korytarz

Gniazda – sypialnie

Suszarka

Gniazda zewnętrzne / ogrody (TP44)

Oświetlenie – strefa dzienna

Piekarnik

Zmywarka


Gniazda – pokój / biuro

Oświetlenie – pomieszczenia gospodarcze

Rezerwa

Falownik PV – strona AC

Magazyn energii / falownik hybrydowy (gr...)

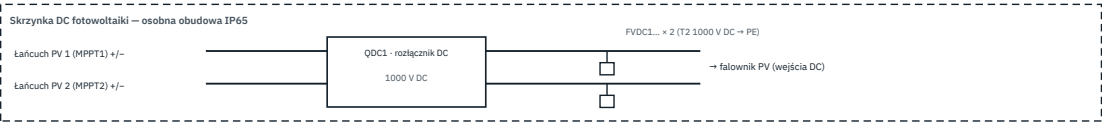

Svalcon · Consumer unit M · PV · flush-mounted

Nr wzór · marka wg dostępności · obudowa – (6 × 12 mod.)

Wersja karta 2026-10-14 · 2026-10-25 · arkusz 1/1

SZKIC – do weryfikacji przez elektryka uprawnionego