



# Consumer unit S · PV + EV · flush-mounted · door: anthracite

Flat or small house up to about 80 m<sup>2</sup> with one kitchen, with solar PV and an EV charger in one board.

## PLN 8,031.90

incl. 23% VAT · PLN 6,530.00 excl. VAT · excluding delivery

|           |                                                                                                                                                              |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Size      | <b>Size S — flat or small house up to approx. 80 m<sup>2</sup>, about 10 circuits</b>                                                                        |
| Enclosure | <b>48-module enclosure — room for the inverter, home battery and EV charger; one size up from the Standard version (36 modules), same number of circuits</b> |

Some items have a preliminary price (new in our range) — we will confirm it when we check your order.

10 circuits in 2 groups of 4-pole Type A RCDs (30 mA), induction hob on a 3-phase circuit, T1+T2 surge protection. Solar PV (inverter section, DC combiner box, battery section) and an 11 kW charger with a Type B RCD. 48-module enclosure (4 rows × 12) — room for the inverter, home battery and EV charger; one size up from the Standard version (36 modules), same number of circuits. Devices take 41 — 14% spare.

### MOUNTING AND DIMENSIONS

|                           |                                                                      |
|---------------------------|----------------------------------------------------------------------|
| Mounting                  | <b>flush-mounted — back box built into the wall, frame with door</b> |
| Wall opening              | <b>366 × 780 mm, depth 89 mm</b>                                     |
| Minimum wall thickness    | <b>110 mm</b>                                                        |
| Frame with door (visible) | <b>396 × 810 mm</b>                                                  |

Approximate dimensions — we confirm them against the data sheet of the selected enclosure in the order confirmation (before you cut the recess).



### CONTENTS

48-module enclosure · 4 rows · devices take 41

|                                                                                                    |         |
|----------------------------------------------------------------------------------------------------|---------|
| Main switch, surge protection device, phase indicators, N/PE terminal bars                         | 8 mod.  |
| 4-pole Type A residual current devices (RCDs) × 2 (circuit groups)                                 | 8 mod.  |
| Circuit breakers (MCBs) × 10 (sockets, lighting, appliances; induction hob — 3-phase)              | 12 mod. |
| Flush-mounted enclosure (back box for building into the wall, frame with door)                     | —       |
| Door: anthracite                                                                                   | —       |
| Solar PV — inverter AC section                                                                     | 3 mod.  |
| Solar PV — DC combiner box, 2 MPPT — separate enclosure: Solar PV — DC combiner box, 2 MPPT — IP65 | —       |

### SPECIFICATIONS

Door: **Anthracite — Graphite powder coating — for dark interiors and ceilings.**

DIN modules: **41 used of 48 (spare 7)**

Circuits: **10 (max. 18 in this enclosure)**

Residual current devices (RCDs): **2 × 4-pole 40 A, 30 mA, Type A — circuits split into groups**

Surge protection device (SPD): **T1+T2**

Lead time: 5–10 working days from receipt of the deposit.

Included: wiring diagram, circuit chart, test report, EU declaration of conformity, 24-month warranty. Built to EN 61439-3 (PN-EN 61439-3). Technical documents are issued in Polish.  
<https://svalcon.co.uk/products/s-pv-ev?mounting=flush>

Consumer unit S · PV + EV · flush-mounted · door: anthracite

CIRCUITS AND RCD GROUPS

Typical set of circuits for this size (board model shared by the shop and the workshop). Cable sizes are indicative — selected by length and installation method.

Circuit names and the diagram are in Polish.

| Ref. | Circuit / load                                             | Protection | Poles | Phase | Cable | RCD |
|------|------------------------------------------------------------|------------|-------|-------|-------|-----|
| F1   | Oświetlenie — strefa dzienna                               | B10        | 1P    | L2    | 3×1,5 | Q1  |
| F2   | Gniazda — salon                                            | B16        | 1P    | L1    | 3×2,5 | Q1  |
| F3   | Piekarnik                                                  | B16        | 1P    | L1    | 3×2,5 | Q1  |
| F4   | Zmywarka                                                   | B16        | 1P    | L3    | 3×2,5 | Q1  |
| F5   | Łazienka — gniazda                                         | B16        | 1P    | L2    | 3×2,5 | Q1  |
| F6   | Gniazda — kuchnia (blat)                                   | B16        | 1P    | L3    | 3×2,5 | Q2  |
| F7   | Płyta indukcyjna (3-fazowa)                                | B16        | 3P    | L1–L3 | 5×2,5 | Q2  |
| F8   | Pralka                                                     | B16        | 1P    | L2    | 3×2,5 | Q2  |
| F9   | Oświetlenie — sypialnie i korytarz                         | B10        | 1P    | L1    | 3×1,5 | Q2  |
| F10  | Gniazda — sypialnie                                        | B16        | 1P    | L3    | 3×2,5 | Q2  |
| F11  | Falownik PV — strona AC — Ochrona różnicowoprądowa w...    | C20        | 3P    | L1–L3 | 5×4   | —   |
| F12  | Magazyn energii / falownik hybrydowy (przygotowanie) — ... | C20        | 3P    | L1–L3 | 5×4   | —   |
| F13  | Ładowarka samochodu (wallbox) 11 kW                        | B16        | 3P    | L1–L3 | 5×4   | Q3  |


RCD GROUPS

|    |                                              |
|----|----------------------------------------------|
| Q1 | RCD 4P 40 A 30 mA typ A: F1, F2, F3, F4, F5  |
| Q2 | RCD 4P 40 A 30 mA typ A: F6, F7, F8, F9, F10 |
| Q3 | RCD 4P 40 A 30 mA typ B (ładowarka): F13     |

Schemat jednokreskowy – Consumer unit S · PV + EV · flush-mounted · door: anthracite

marka wg dostępności · podtynkowa · nr wzór

Zasilanie z licznika: 3/N/PE – 400/230 V 50 Hz · sieć TN-C-S · zabezpieczenie przedlicznikowe gG / B ≤ 32 A (typowo 25–32 A, wg warunków przyłączenia)

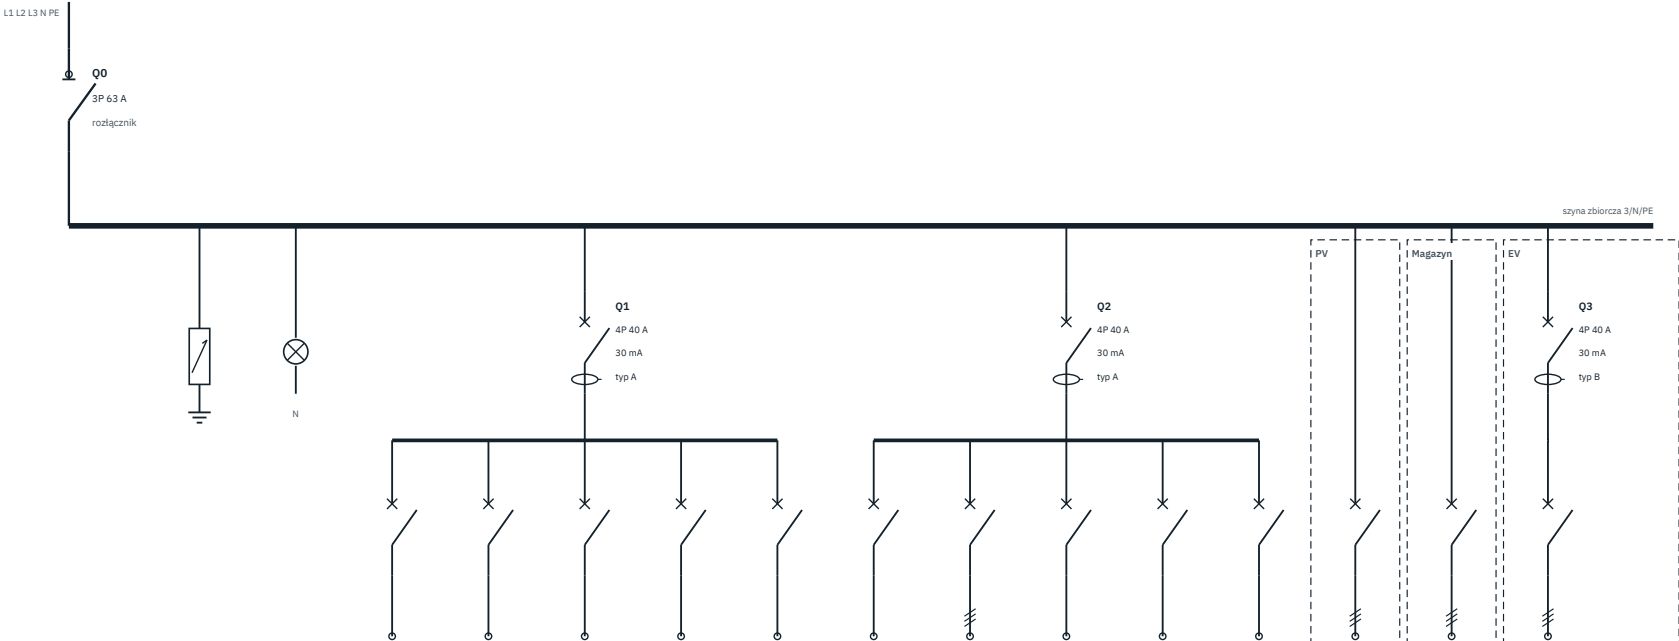

| Oznaczenie     | FV1   | H1     | F1    | F2    | F3    | F4    | F5    | F6    | F7    | F8    | F9    | F10   | F11   | F12   | F13   |
|----------------|-------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Zabezpieczenie | T1+T2 | —      | B10   | B16   | B16   | B16   | B16   | B16   | B16   | B16   | B10   | B16   | C20   | C20   | B16   |
| Bieguny        | 3+1   | 3 × 1P | 1P    | 1P    | 1P    | 1P    | 1P    | 1P    | 3P    | 1P    | 1P    | 1P    | 3P    | 3P    | 3P    |
| Faza           | L1–L3 | L1–L3  | L2    | L1    | L1    | L3    | L2    | L3    | L1–L3 | L2    | L1    | L3    | L1–L3 | L1–L3 | L1–L3 |
| Przewód [mm²]  | —     | —      | 3×1,5 | 3×2,5 | 3×2,5 | 3×2,5 | 3×2,5 | 3×2,5 | 5×2,5 | 3×2,5 | 3×1,5 | 3×2,5 | 5×4   | 5×4   | 5×4   |
| Moc szac. [kW] | —     | —      | 0,4   | 1,5   | 3     | 2     | 2     | 2     | 7,2   | 2,2   | 0,3   | 1     | —     | —     | 11    |

Odbiornik

- Ogranicznik przepięć → PE
- Lampki obecności faz
- Oświetlenie – strefa dzienna
- Gniazda – salon
- Piekarnik
- Zmywarka
- Łazienka – gniazda
- Gniazda – kuchnia (biał)
- Płyta indukcyjna (3-fazowa)
- Pralka
- Oświetlenie – sypialnie i korytarz
- Gniazda – sypialnie
- Falownik PV – strona AC
- Magazyn energii / falownik hybrydowy (gr...)
- Ładownia samochodu (waliboo) 11 kW



Svalcon · Consumer unit S · PV + EV · flush-mounted · door: anthracite

Nr wzór · marka wg dostępności · obudowa – (4 × 12 mod.)

Wersja karta 2026-10-14 · 2026-10-25 · arkusz 1/1

SZKIC – do weryfikacji przez elektryka uprawnionego